
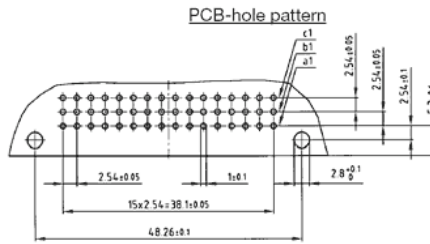


Mini Type C
Male connector
Contact spacing
.100" and .200"

Directive 2002/95/EC
"RoHS"
Compliant

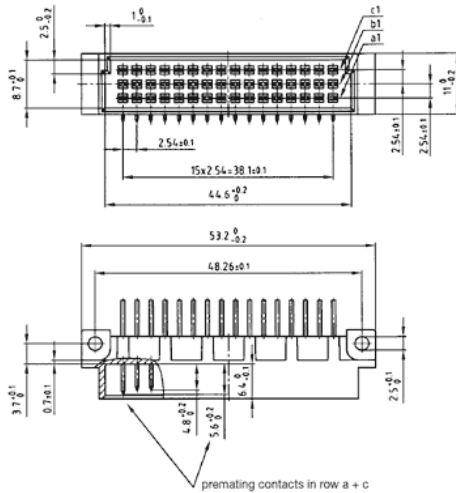


Note:

Premating contacts available in row "a", "b" and "c", please consult factory.

angled with clip

Solder pin

angled with clip

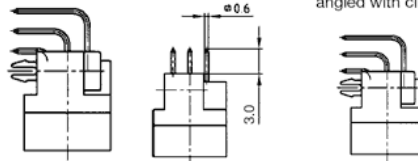

Part Numbers

No. of Pos.	• = contact + = no contact	angled	Solder pin	angled with clip
16	Pos. 1 2 3 4 5 ... row c + + + + + row b + + + + + row a • • • • •	121 A 10349 X	121 A 10399 X	121 A 20929 X
16	Pos. 1 2 3 4 5 ... row c + • + • + • row b + + + + + row a + • + • + •	121 A 10359 X	121 A 10409 X	121 A 20939 X
32	Pos. 1 2 3 4 5 ... row c • • • • • row b + + + + + row a • • • • •	121 A 10379 X	121 A 10429 X	121 A 20959 X
48	Pos. 1 2 3 4 5 ... row c • • • • • row b • • • • • row a • • • • •	121 A 10389 X	121 A 10439 X	121 A 20969 X

Clip for PCB $\varnothing 2.8 + 0.1$ mm, PCB-thickness = 1.6 mm