



## Resistive Termination (Plug Type)

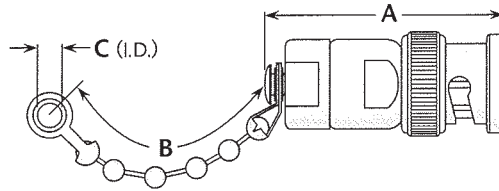


Resistor	Dimensions			Features	Plating		Delta P/N
	A	B	C		Body	Contact	
51Ω ±5%, 1/2 Watt	1.25	3.50	.144		Nickel	Gold (C)	MX-554/U
51Ω ±5%, 1/2 Watt	1.41	3.50	.144		Nickel	Silver (C)	MX-554A/U
51Ω ±5%, 1/2 Watt	1.14	—	—	No chain	Nickel	Gold (C)	1031-000-N00A-3
51Ω ±5%, 1 Watt	1.50	4.50	.130		Nickel	Silver (C)	1051-000-N000
51Ω ±5%, 1 Watt	1.39	—	—	No chain	Nickel	Silver (C)	1051-000-N00A-5
75Ω ±5%, 1/2 Watt	1.41	3.50	.144		Nickel	Silver (C)	1031-000-N000-4
75Ω ±5%, 1/2 Watt	1.14	—	—	No chain	Nickel	Gold (C)	1031-000-N00A-1
75Ω ±5%, 1 Watt	1.39	—	—	No chain	Nickel	Silver (C)	1051-000-N00A-2

## Dust Caps

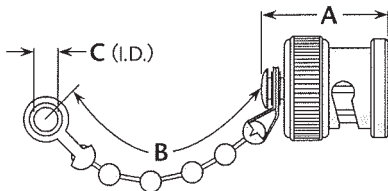

**Figure 1**  
(Shown with bead chain)

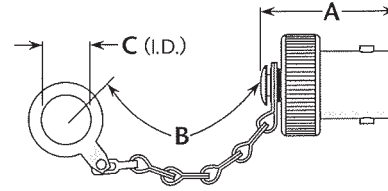

**Figure 2**  
(Shown with safety chain)

Figure	Dimensions			Features	Plating		Delta P/N
	A	B	C		Body	Contact	
1	.67	2.25	.144	Bead chain	Nickel	—	CW-123A/U
1	.59	—	—	No chain	Nickel	—	CW-155A/U
1	.69	2.25	.144	Bead chain / shorting type	Nickel	Silver (C)	CW-159/U
1	.67	2.25	.144	Bead chain	Silver	—	M39012/25-0006
1	.67	2.70	.52	Safety chain	Silver	—	M39012/25-0007
2	.69	3.25	.281	Bead chain	Nickel	—	CW-282/U
2	.69	3.25	.281	Bead chain	Silver	—	M39012/25-0008
2	.69	3.25	.281	Safety chain	Silver	—	M39012/25-0009

(C) in contact plating column indicates captive contact. • See page 6 for alternate body plating information.  
Caps and terminations are available with other chain styles and/or resistances.