

Panel Jack Receptacles

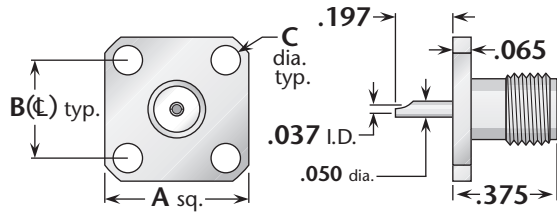


Figure 1
(Solder pot contact—square flange)

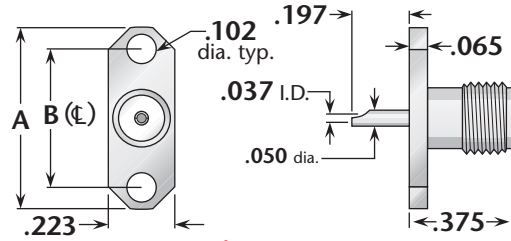


Figure 2
(Solder pot contact—2-hole flange)

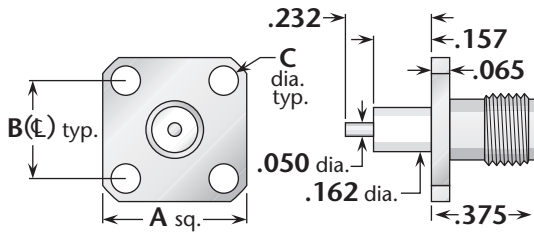


Figure 3
(Post contact—square flange)

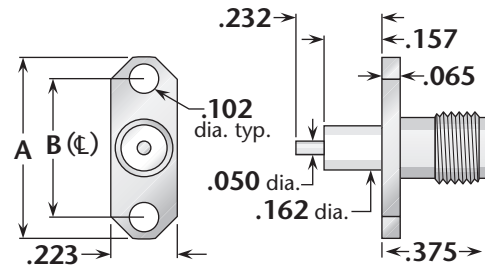


Figure 4
(Post contact—2-hole flange)

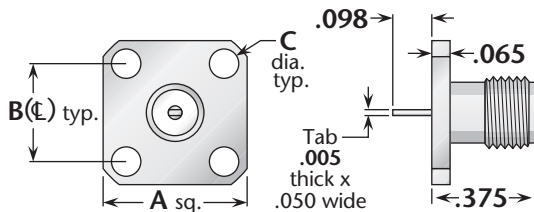


Figure 5
(Tab contact—square flange)

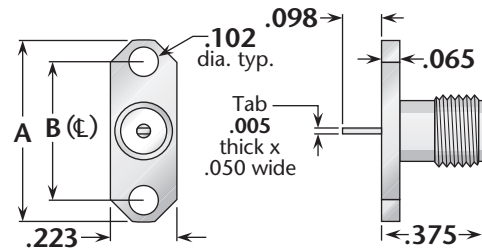


Figure 6
(Tab contact—2-hole flange)

Figure	Dimensions			Mounting Figure	Plating		Delta P/N
	A	B	C		Body	Contact	
1	.500	.340	.102	05	Gold*	Gold (C)	1313-000-G051-500
2	.625	.481	.102	92	Gold*	Gold (C)	1313-000-G921-500
3	.500	.340	.102	05	Gold*	Gold (C)	1358-000-G051-500
4	.625	.481	.102	92	Gold*	Gold (C)	1358-000-G921-500
5	.500	.340	.102	05	Gold*	Gold (C)	1358-000-G051-501
6	.625	.481	.102	92	Gold*	Gold (C)	1358-000-G921-501

* Also available with nickel-plated body—change **G** in Delta part number to **N**.
See page 203 for mounting dimensions. • (C) in contact plating column indicates captive contact (mechanical captivation).
All items available with other flange, contact, and insulator configurations.