


Suggested Panel Cutout



Maximum Panel Thickness: 0.315 [8.0]

FEATURES:



- Vandal Resistant
- Water Resistant
- Long Life Expectancy

SPECIFICATIONS:


RATING: 2A 48VDC
TEMPERATURE: -20°C to 70°C
ELECTRICAL LIFE: 200,000 Cycles
CONTACT RESISTANCE: 50mΩ Max. at 1A 12VDC
INSULATION RESISTANCE: 1,000MΩ Min.
DIELECTRIC STRENGTH: 2,000VAC for 1 Minute
INTRUSION PROTECTION: IP65

MATERIALS:

BUSHING: Gold Plated Brass
 Nickel Plated Brass
 Stainless Steel
ACTUATOR: Gold Plated Brass
 Nickel Plated Brass
 Stainless Steel
BASE: Polybutylene Terephthalate, UL94 V-2
SEALING: Silicone
 Stainless Steel
INNER ASSEMBLY: Polyamide 6/6
 Brass
SPRING: Steel
CONTACT: Silver Plated Brass
TERMINALS: Silver Plated Brass
 Steel
HARDWARE: Nickel Plated Brass

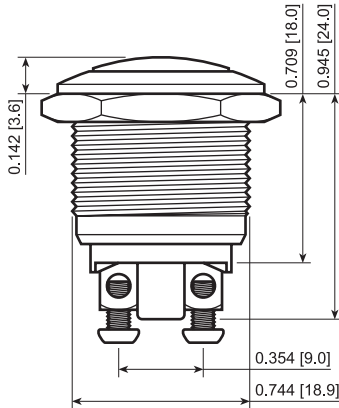

Actuator Options



SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE



PV1H640SS

PV1S640GG



PV1H640NN



PV1F640SS

STANDARD PART NUMBERS:

- PV1F640GG 1P Off-(On)
Flat Actuator, Gold Plated Finish
- PV1F640NN 1P Off-(On)
Flat Actuator, Nickel Plated Finish
- PV1F640SS 1P Off-(On)
Flat Actuator, Stainless Steel Body
- PV1H640GG 1P Off-(On)
High Actuator, Gold Plated Finish
- PV1H640NN 1P Off-(On)
High Actuator, Nickel Plated Finish
- PV1H640SS 1P Off-(On)
High Actuator, Stainless Steel Body
- PV1S640GG 1P Off-(On)
Domed Actuator, Gold Plated Finish
- PV1S640NN 1P Off-(On)
Domed Actuator, Nickel Plated Finish
- PV1S640SS 1P Off-(On)
Domed Actuator, Stainless Steel Body

Series	Actuator Options	Terminal	Function	Rating	Body Finish	Actuator Finish	Contact Material
PV1	F - Flat H - High S - Domed	6 - Screw	1 Pole: 4 - Off-(On)	0 - 2A 48VDC	G - Gold N - Nickel S - Polished Stainless Steel B - Brushed Stainless Steel	G - Gold N - Nickel S - Polished Stainless Steel B - Brushed Stainless Steel	None - Silver G - Gold