



REV.	DESCRIPTION/ECO NO.	DATE
	RELEASED	5/30/08

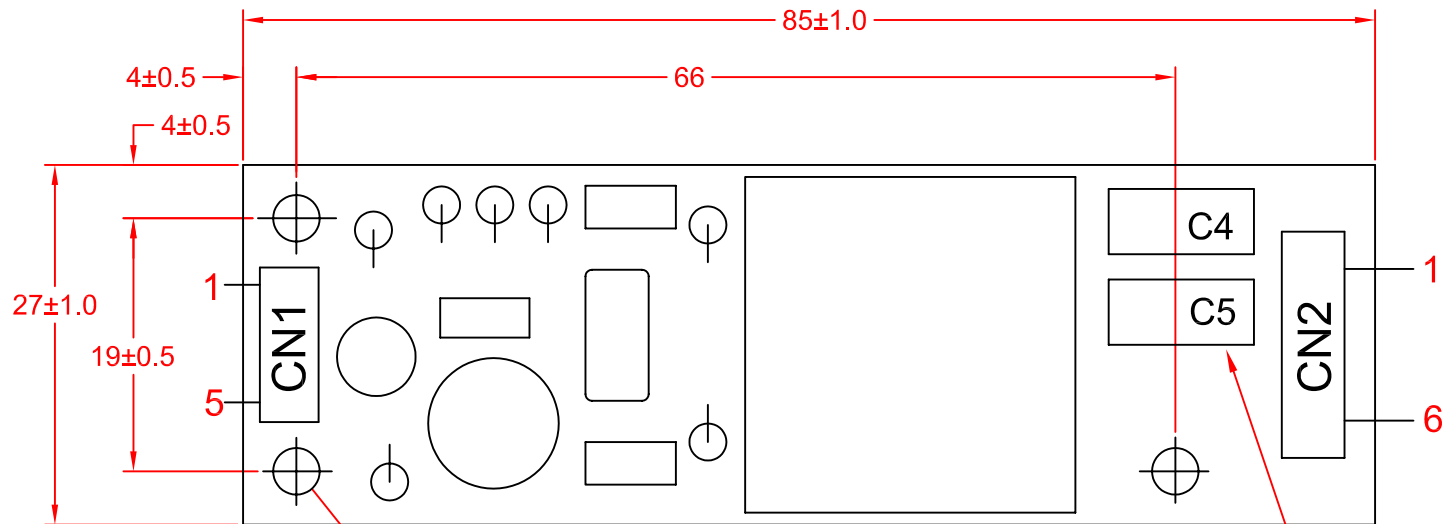

NOTE:
C4: 27PF, 3KV
C5: 27PF, 3KV

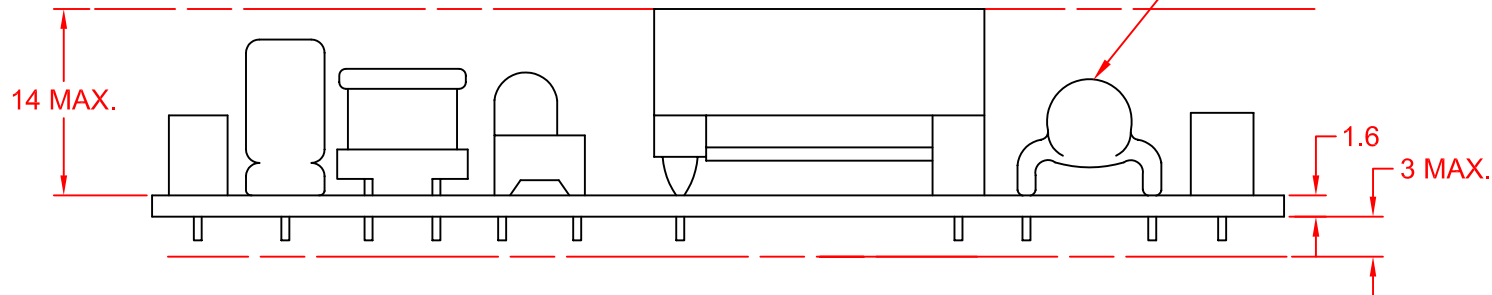

NO.	PIN NUMBER	JKL MATING WIRE HARNESS
CN1	1	BXC-10605
	2	
	3	
	4	
	5	
CN2	1	BXC-10992
	2	
	3	
	4	
	5	
	6	

NOTE:
 MATING CONNECTORS ARE NOT INCLUDED WITH INVERTER. JKL WIRE HARNESS BXC-10605 AND BXC-10992 CAN BE ORDERED SEPARATELY.

OPERATING SPECIFICATIONS

CHARACTERISTICS	MIN	TYP	MAX
INPUT VOLTAGE: (vdc)	10.8	12.0	13.2
INPUT CURRENT: (mA)	---	550	1000
OUTPUT VOLTAGE: (Vrms)	---	1500	---
OUTPUT CURRENT 2 X (mA)	4.5	5.0	---
OUTPUT FREQUENCY: (kHz)	20	30	40
DIMMING RANGE (OPTION)	10% REF.	---	100% REF.
OPERATING TEMP: (CELSIUS)	0	25	50

METRIC THIRD ANGLE PROJECTION	DIMENSIONS ARE IN MILLIMETERS TOLERANCE UNLESS OTHERWISE SPECIFIED 1 PL +/- 0.3 2 PL +/- ANGLE +/- 0	JKL COMPONENTS CORPORATION			
	TITLE INVERTER WITH DIMMING OPTION				
DRAWN BY L. WENGSTROM	APP'VD BY LARRY R.	DATE 5/30/08	SIZE A	FSCM NO. 55335	DRAWING NO. BXA-12579/MOD5
- CAD DRAWING - MANUAL REVISIONS NOT PERMITTED			SCALE NONE	RELEASED DATE 5/30/08	REVISION DATE
				REV. NO.	SHEET OF