

ENVIRONMENTALLY FRIENDLY MOTION SENSOR, CONTAINS NO HAZARDOUS MATERIALS.

NOTES:

1. ELECTRICAL:

1.1 CONTACT CAPACITY: 60 VOLTS MAX., .1 AMPS MAX., 3 VA. MAX.

1.2 CONTACT RESISTANCE 100 OHMS MAX.

MEASURED 45 DEG. BELOW HORIZONTAL AT 5 VDC.

2. OPERATE:

2.1 MAXIMUM MAKE ANGLE 10 DEG. BELOW HORIZONTAL.


2.2 MAXIMUM BREAK ANGLE 10 DEG. ABOVE HORIZONTAL.

2.3 DIFFERENTIAL ANGLE 15 DEG. MAX.


3. FINISH:

3.1 EXTERNALLY TIN PLATED.

REV.	DATE	REVISION RECORD	DR.
A	10/97	REDRAWN	G.P.
B	6/98	UPDATE	S.T.

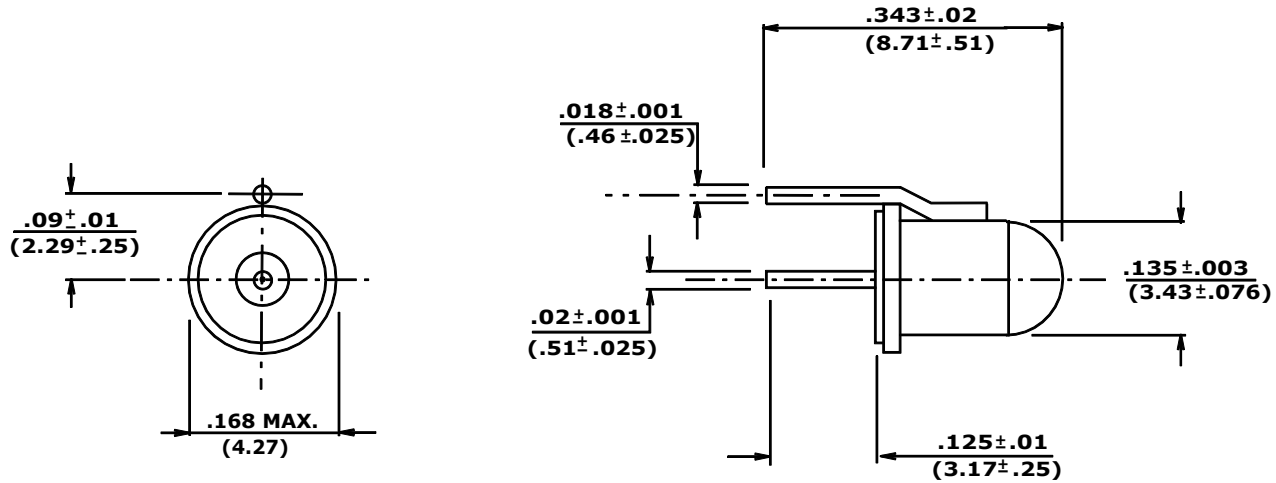

US PATENT NUMBERS 5209343 AND 5332876

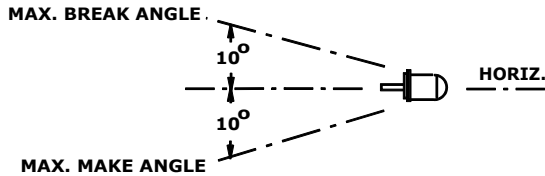

COMUS INTERNATIONAL
 454 ALLWOOD RD. CLIFTON, NJ 07012 U.S.A. PH (973) 777-6900

TOLERANCES (except as noted)		REF.:	SCALE: NONE	DRAWN BY: G.P.	APPROVED:
DECIMAL	FRACTIONAL	TITLE: TILT SWITCH			
$\pm .01$ (.254) 2 Digit	$\pm 1/64$ (.397)	DATE: 10/29/97	DRAWING NUMBER:	CW1600-1	
$\pm .005$ (.127) 3 Digit	ANGULAR $\pm 1/2^\circ$	DATE:			