



DRAWING #: AG3011-70

| | | | |
|------|---------|----------------------|------|
| REV. | DATE | REVISION DESCRIPTION | DR. |
| D | 3/24/05 | SEE ECN 2005-034 | L.L. |

ENVIRONMENTALLY FRIENDLY TILT SENSOR, CONTAIN NO HAZARDOUS MATERIALS

NOTES:

1. ELECTRICAL:
 - 1.1 CONTACT CAPACITY 1 AMP. MAX. AT 6 TO 24 V DC, 25 WATT LAMP AT 120 VAC.
 - 1.2 CONTACT RESISTANCE 3 OHMS MAX.
2. OPERATE:
 - 2.1 DIFFERENTIAL ANGLE 10° MAX..
3. EXTERNAL FINISH:
 - 3.1 PLASTIC HOUSING.
 - 3.2 WIRE #18 AWG, STRANDED COPPER, NEOPRENE INSULATION, COLOR BLACK.

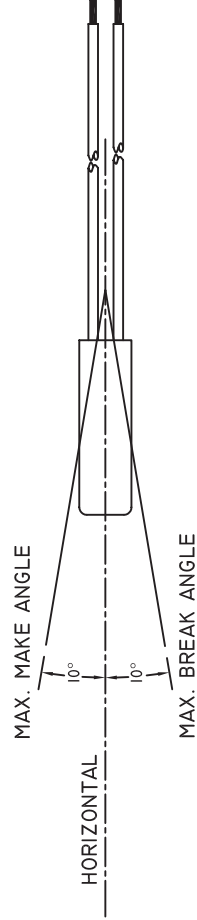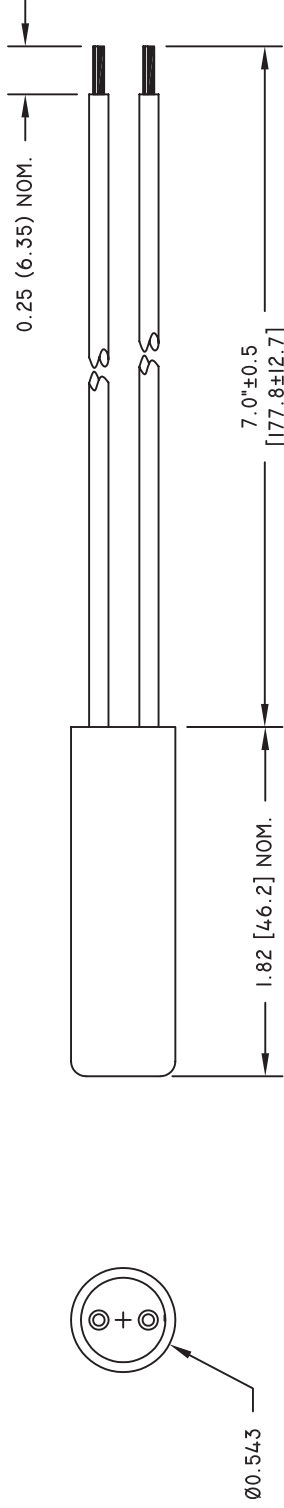

WORKING POSITION

COMUS INTERNATIONAL

454 ALLWOOD ROAD, CLIFTON, NEW JERSEY 07012

TEL. (973) 777-6900

| | | | | | |
|-------------|-----------------------------------------------|---------------------------------|--------|-----------|------------|
| ENGINEERING | UNSPECIFIED TOLERANCES | REF.: | SCALE: | DRAWN BY: | DATE |
| QUALITY | DECIMAL: .XX ±.01 [.254] .XXX ±.005 [.127] | | NONE | S.T | 01/18/2005 |
| PRODUCTION | FRACTIONAL: ± 1/64 [.397] | TITLE: ENCAPSULATED TILT SWITCH | | | |
| APPROVAL | ANGULAR: ± 1/2° | DRAWING #: | | AG3011-70 | |