
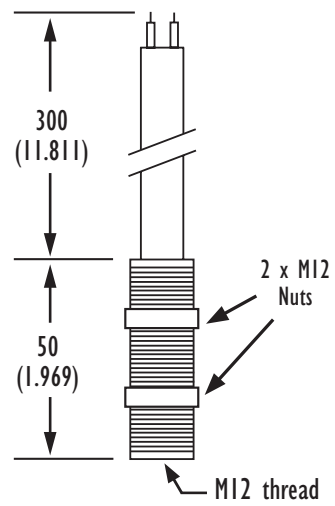









Part Number : PTA 230/30
Proximity Switch - Reed Switch based
Threaded - Normally Open Contacts - Suggested Magnet: PTM 12
Product Data Sheet

PICTURE	DIMENSIONS	Applications Include
		<ul style="list-style-type: none"> ● Position and limit sensing. ● Linear actuators . ● Security system switch. ● Door Switch.
<p>✓ RoHS Compliant</p> <p>Drawings not to scale All dimensions in mm(inches) nominal</p>		Options
		<ul style="list-style-type: none"> ● M12 Thread ● Custom cable lengths, strip lengths, cable types, terminations. ● If you do not see what you need, just ask, as there is a strong possibility we can do it !

SPECIFICATION	
Contact Form / Style	Normally Open
Switching Capacity (Resistive)	60 W/VA Max.
Switching Voltage	230 VAC Max.
Switching Current	3.0 A. Max.
Carry Current	4.0 A. Max.
Breakdown Voltage	600 VDC Min.
Contact Resistance	80 mOhms Max.
Switching Distance	8 mm Min.
Operating Temperature Range	-20°C +85°C
Storage temperature	-25°C +90°C
Case Material	Brass-Nickel Plated
Cable	2 x Round 0.50mm ² PVC covered Black and insulated Brown / Blue

Did you know we also sell?

						
Float Switches	Magnets	Movement Sensors	Tilt / Tip Switches	Acceleration / Shock Switches	Reed Relays	Solid State Relays

Rev. No.	Revision Note	Date	Signature
2	Datasheet Redesign	28-07-06	LG