


Rack & Panel

SM Series


Sub Miniature / #20 - #24 Contacts / 3 And 7.5 Amps



N
Nylon Nut



SM2
Receptacle



SM2P
Plug



SMH
Hood

Extreme compactness and lightweight of these subminiature connectors make them ideal for limited space application in Aircraft. Portable Equipment and Instrumentation.

SPECIFICATIONS

Current Rating: SM1 - 7.5 amps;
SM2, SM3 - 3 amps

No. of Contacts: 1, 2, 3

Pin Contacts: SM1 - .040 dia. brass, gold plated
SM2, SM3 - .025 dia. brass, gold plated

Socket Contacts: Phosphor bronze, gold plated

Terminations: SM1 - .048 dia. solder cup will accept up to #20 AWG stranded wire.
SM2, SM3 - .037 dia. solder cup will accept up to #24 AWG stranded wire.

Electrical Data: Dielectric withstanding voltage is one minute electrification at 1200 VAC.

Dielectric: Diallyl Phthalate per MIL-M-14, type SDG-F. Color Gray.

Polarization: Body design allows engagement in only one position.

Mounting: Either plug or receptacle may be mounted on chassis or bulkhead with 1/4 - 28 cadmium plated brass nut. Add "N" to code number to order.

Hood: Cable hood may be applied to both plug and receptacle. Add "H" to code number. When ordering a hood separately, order P/N SMH.

PHYSICAL AND ELECTRICAL DATA

Current Rating	Weight in Ounces		* Wire Range
	P.	R.	
SM1 - 7.5 Amp	.02	.02	SM1 - #20
SM2 - 3 Amp	.02	.02	SM2 - #24
SM3 - 3 Amp	.02	.02	SM3 - #24

* Stranded




Rack & Panel

SM Series


Sub Miniature / #20 - #24 Contacts / 3 And 7.5 Amps

OUTLINE

Dimensions are for reference only and are subject to change. Outline drawings on request.

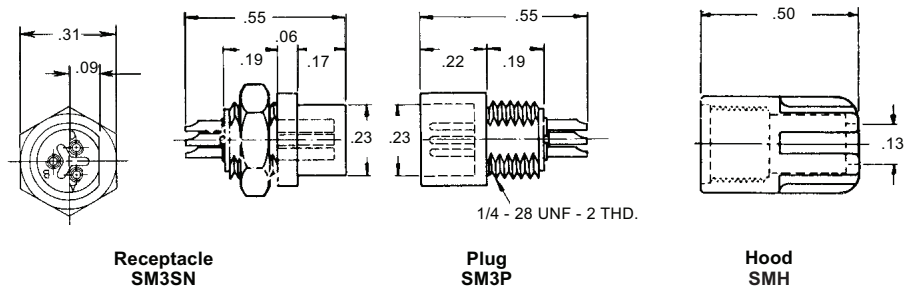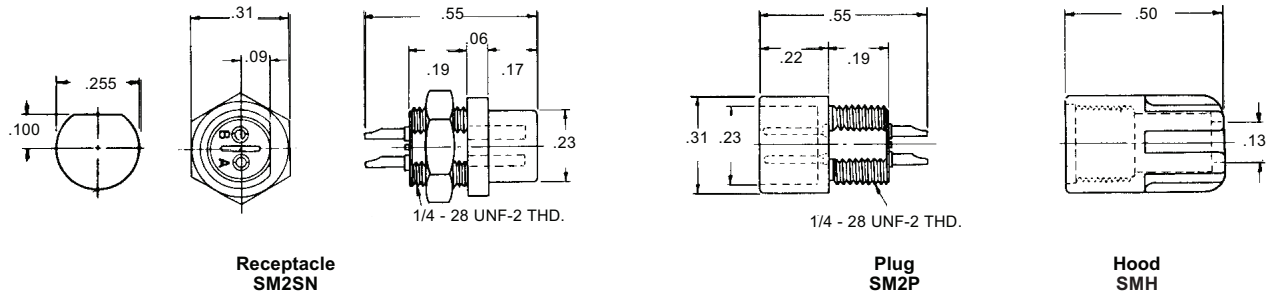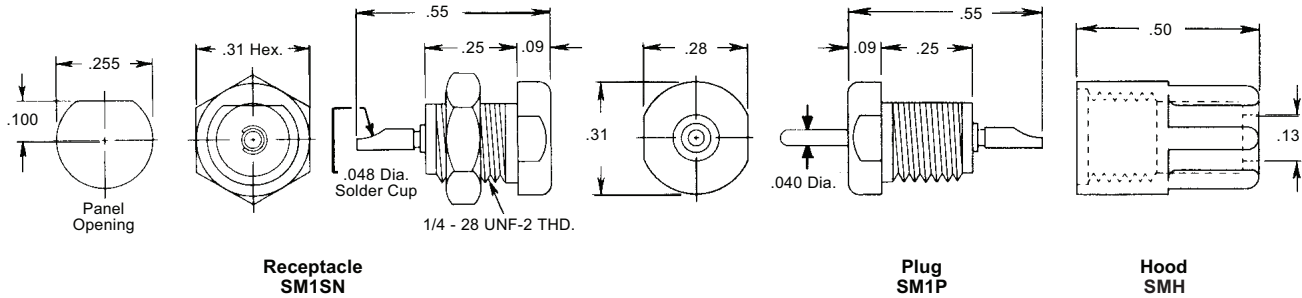

ORDERING INFORMATION

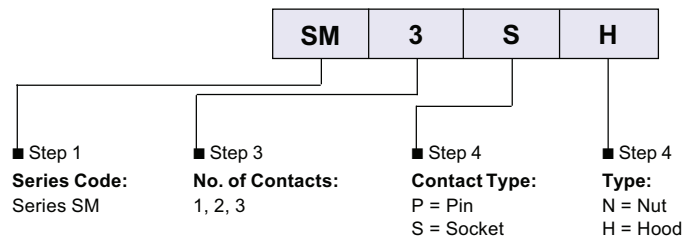

Winchester

62 Barnes Industrial Road North, Wallingford, Connecticut 06492 Phone:(203)741-5400 Fax:(203)741-5500 www.winchesterelectronics.com